



Item (Detail view)

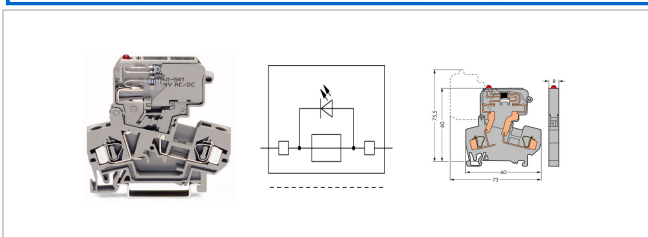

Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; 15 ... 30 V; with blown fuse indication by led

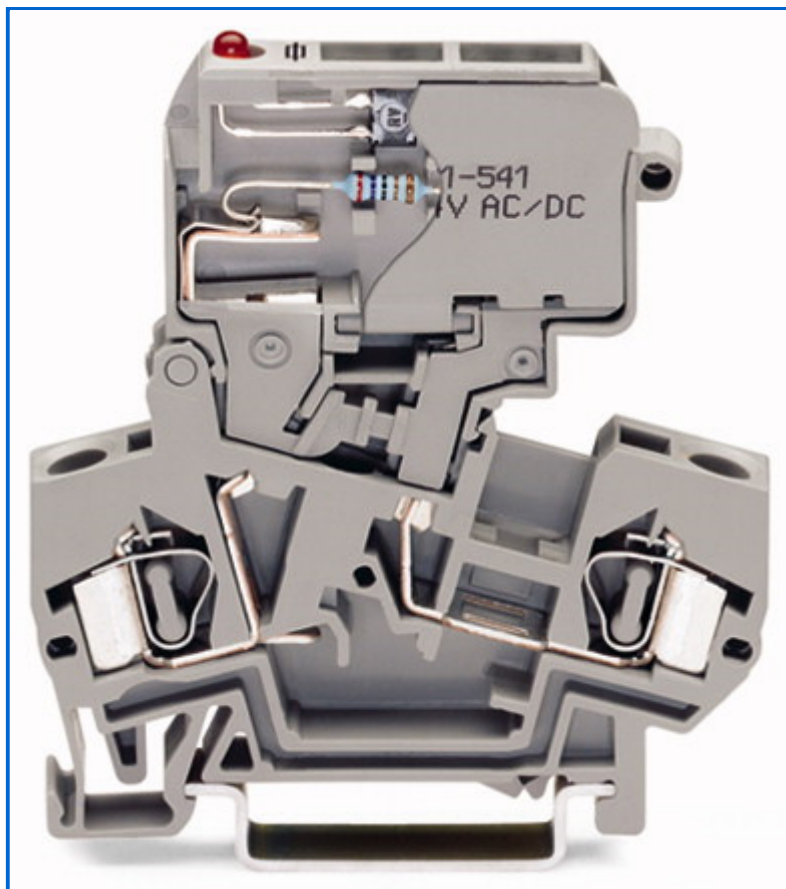

Item no.	281-611/281-541	GTIN / EAN	4045454871451
Content	1 piece	Order unit piece	
Order quantity	<input type="text" value="50"/> piece	Increase in order quantity	(50, 100, 150, 200, ...)
Customer item no.		Customs Tariff no.	85369085990
Customs duty for the country of origin	CN	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local

Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; 15 ... 30 V; with blown fuse indication by led

WAGO company.

Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ✓
Compliant

Articledetails	Approbations	Downloads	Accessories
Description	Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; 15 ... 30 V; with blown fuse indication by led		
Remarks	Safety information 1: Both nominal voltage and current are given by the LED or fuse.		
Item properties	Miscellaneous		
	Name	Value	Unit
	Total number of connection points	2	
	Total number of potentials	2	
	Color	gray	
	Ratings according to 1	IEC/EN 60947-7-3	
	Pollution degree (1)	3	
	Rated voltage EN (1) [V]	800	V
	Rated surge voltage (1) [kV]	8	kV
	Nominal current [A]	10	A
	Connection technology (1)	CAGE CLAMP®	

Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; 15 ... 30 V; with blown fuse indication by led

Solid sizes 1	0.08 ... 4 mm ² / 28 ... 12 AWG	
Fine-stranded wires 1	0.08 ... 4 mm ² / 28 ... 12 AWG	
Strip length 1	9 ... 10 mm / 0.35 ... 0.39 in	
Type of wiring	Front-entry wiring	
Design	angled	
Marking level	Center marking	
Insulating material	PA 6.6 V0	
Fire load [MJ]	0.336	MJ
Weight [g]	17.827	g
Width	8 mm / 0.315 in	
Height from upper-edge of DIN-rail	60 mm / 2.362 in	
Length	60 mm / 2.362 in	
Type of mounting	DIN 35 rail	
Safety information 2	Leakage current in case of blown fuse: LED 6mA	

[Upwards](#)