

Y03




- Electronic sounder
- 32 tones
- 2 stage alarm
- Volume control
- IP65



Order Code	Voltage	Current	Weight
Y0D3021	12-35VDC	20-67mA	0.32kg
Y0D3041	48VDC	35mA	
Y0D3071	115VAC ±10%	25mA	0.39kg
Y0D3081	230VAC ±10%	20mA	

Specifications:

Sound output*:	Max 100dB @1m
Sound frequency:	32 Tones see tone list on page 312
Protection:	IP65
Temp rating (°C):	-25 to +55
Rating:	Continuous
Cable entry:	2 x 20mm
Construction:	Flame retardant ABS

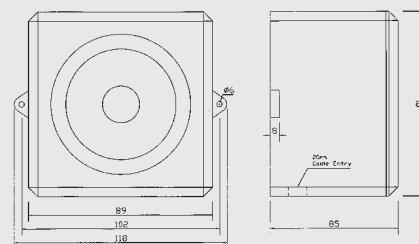


Dimensions in mm

Y04 – YL4



- Electronic sounder or sounder/beacon combination
- 32 tones
- 2 stage alarm
- Sounder and beacon controlled independently
- Volume control
- Red or white housing
- IP65

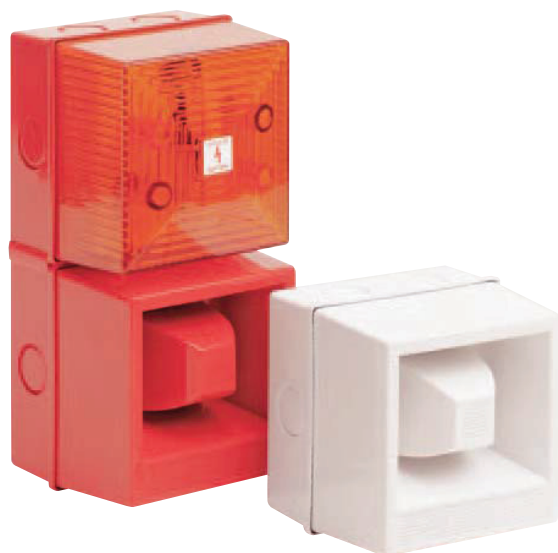


Order Code	Voltage	Current Sounder	Current Beacon	Weight
Y04 (YA40) sounder				
Y0D1800#	24VDC	35mA	-	0.25kg
Y0D1801#	115VAC ±10%	25mA	-	0.35kg
Y0D1802#	230VAC ±10%	13mA	-	
YL4 (YL40) sounder-beacon				
Y0D1800#*	24VDC	35mA	250mA	0.510kg
Y0D1801#*	115VAC ±10%	25mA	130mA	0.570kg
Y0D1802#*	230VAC ±10%	13mA	70mA	

#Specify housing colour R = Red, W = White

*Specify lens colour A = Amber, B = Blue, C = Clear, G = Green, R = Red

Specifications:

Sound output*:	Max 106dB @1m
Sound frequency:	32 Tones see tone list on page 312
Flash energy:	5J
Light output:	14cd(e)
Flash Rate:	60fpm
Protection:	IP65
Temp Rating (°C):	-25 to +55
Rating:	Continuous
Cable Entry:	2 x 20mm
Construction:	Flame retardant ABS

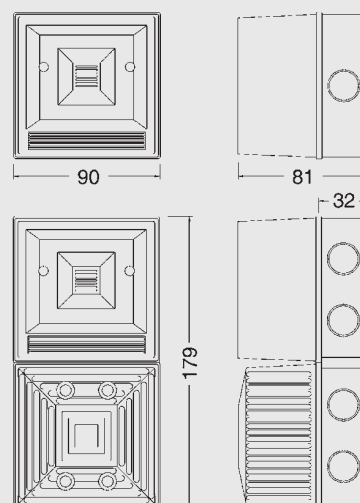

Dimensions in mm