



## CCG Earth Tags

### CCG SLIP ON EARTH TAGS

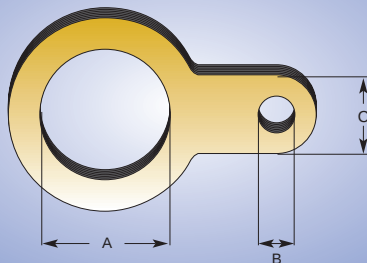

### CCG SCREW ON EARTH TAGS

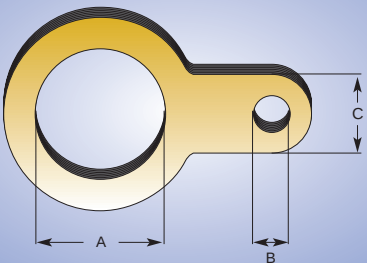

| Product Code | Size Reference | Diameter 'A' | Diameter 'B' | Dimension 'C' | Square Section    |
|--------------|----------------|--------------|--------------|---------------|-------------------|
| 6220-1       | 0/1            | 20mm         | 7mm          | 12mm x 1.5mm  | 18mm <sup>2</sup> |
| 622902       | 2              | 25mm         | 7mm          | 12mm x 1.5mm  | 18mm <sup>2</sup> |
| 622903       | 3              | 32mm         | 12mm         | 22mm x 1.5mm  | 33mm <sup>2</sup> |
| 622904       | 4              | 40mm         | 12mm         | 32mm x 1.5mm  | 48mm <sup>2</sup> |
| 622905       | 5              | 50mm         | 12mm         | 40mm x 1.5mm  | 60mm <sup>2</sup> |
| 622906       | 6              | 63mm         | 12mm         | 40mm x 1.5mm  | 60mm <sup>2</sup> |
| 622907       | 7              | 76mm         | 12mm         | 40mm x 1.5mm  | 60mm <sup>2</sup> |
| 622908       | 8              | 82mm         | 12mm         | 40mm x 1.5mm  | 60mm <sup>2</sup> |
| 622909       | 9              | 90mm         | 12mm         | 40mm x 1.5mm  | 60mm <sup>2</sup> |

### Short Circuit Fault Current Ratings BS6121 Part 5 1993

|      |                |      |                 |
|------|----------------|------|-----------------|
| 20mm | 3.06KA / 1 sec | 50mm | 10.40KA / 1 sec |
| 25mm | 4.00KA / 1 sec | 63mm | 10.40KA / 1 sec |
| 32mm | 5.40KA / 1 sec | 75mm | 10.40KA / 1 sec |
| 40mm | 7.20KA / 1 sec |      |                 |

| Product Code | Size Reference | Thread Size 'A' | Thread Size 'B' | Dimension 'C' | Square Section     |
|--------------|----------------|-----------------|-----------------|---------------|--------------------|
| 6030-1       | 0/1            | M20             | M6              | 10mm x 3mm    | 30mm <sup>2</sup>  |
| 603202       | 2              | M25             | M6              | 10mm x 4mm    | 40mm <sup>2</sup>  |
| 603203       | 3              | M32             | M6              | 12mm x 6mm    | 70mm <sup>2</sup>  |
| 603204       | 4              | M40             | M8              | 20mm x 6mm    | 120mm <sup>2</sup> |
| 603205       | 5              | M50             | M10             | 24mm x 8mm    | 185mm <sup>2</sup> |
| 603206       | 6              | M63             | M12             | 40mm x 8mm    | 300mm <sup>2</sup> |
| 603207       | 7              | M75             | M12             | 40mm x 8mm    | 300mm <sup>2</sup> |
| 603208       | 8              | M82             | M12             | 40mm x 8mm    | 300mm <sup>2</sup> |
| 603209       | 9              | M90             | M12             | 40mm x 8mm    | 300mm <sup>2</sup> |

### Short Circuit Fault Current Ratings BS6121 Part 5 1993

|      |              |      |              |
|------|--------------|------|--------------|
| 20mm | 26KA / 1 sec | 50mm | 43KA / 1 sec |
| 25mm | 26KA / 1 sec | 63mm | 43KA / 1 sec |
| 32mm | 26KA / 1 sec | 75mm | 43KA / 1 sec |
| 40mm | 26KA / 1 sec |      |              |