


Restrained Range 150A 660/1100V receptacle

Ordering Codes

Part Number	Description
150-40-0660	150A 660V Receptacle with 50mm ² 1.3m Tails
150-40-1100	150A 1100V Receptacle with 50mm ² 1.3m Tails
150-40-0660R	150A 660V Receptacle with 50mm ² Thimbles
150-40-1100R	150A 1100V Receptacle with 50mm ² Thimbles
150-40-0660RGB	150A 660V Receptacle with Gland & Bracket
150-40-1100RGB	150A 1100V Receptacle with Gland & Bracket

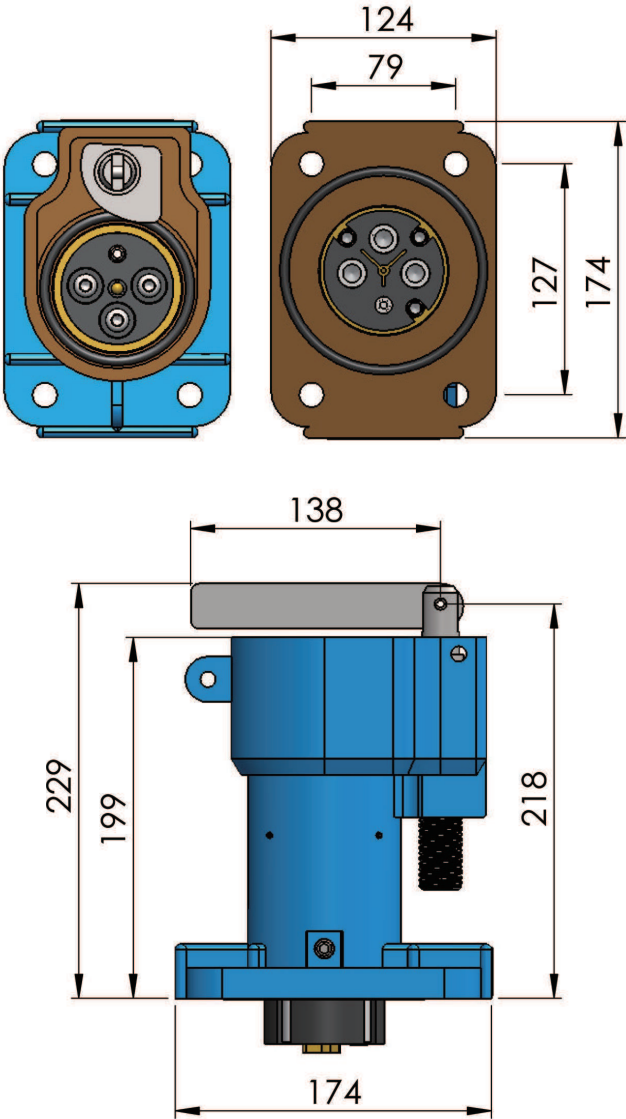

Thimble Kit (table 1)

Part Number	Cable CSA
150-40-1000	50mm ²
150-40-1200	70mm ²


Each Thimble Kit consists of:

- 3 x Main thimbles
- 3 x Earth blocks
- 1 x Pilot thimble

All with their respective screws and washers

Grommet (table 2)

Part Number	Cable O.D.
55-10-1200	11-12mm
55-10-2200	17-22mm
55-10-2500	20-25mm
55-10-3000	25-30mm
55-10-3500	30-35mm
55-10-3900	35-39mm
55-10-4200	39-42mm
55-10-4600	42-46mm
55-10-5400	46-54mm



Colour and Orientation for Voltage

Material: Manganese Bronze /EPR Rubber
 Weight: Approx. 9.2kg
 Compliance: AS/NZS1299

Spare Parts

To order spare parts, please identify from exploded view drawing & refer to appropriate table

Item	Part Number	Description	QTY.
1	150-40-0003	Housing 1100V	1
	150-40-0003-OR	Housing 660V	1
2	150-40-0004R	Interior c/w Pins	1
3	150-40-0002	Jacking Screw	1
4	150-40-9003	Dust Plug	1
5	151-40-9004	Main Pin	3
6	See Table 1	Main Thimble	3
7	See Table 1	Earth Block	3
8	See Table 1	Pilot Thimble	1
9	195-150-0040	O-Ring	1
10	195-05-0114	O-Ring	1
11	990-006-0012	Side Screw	2
12	950-604-1030-CP	Copper Washer	2

RGB Parts

Item	Part Number	Description	QTY.
13	151-40-0041	RGB Housing 1100V	1
	151-40-0041-OR	RGB Housing 660V	1
14	55-10-0002	TRS Gland	1
15	150-40-0020	Bracket	1
16	195-05-0114	O-Ring	1
17	See Table 2	Grommet	1
18	990-010-0035-HT	Gland Bolt	1
19	990-006-0012	Side Screw	1
20	300-40-0021	Earth Strap	1

