


**COMMERCIAL**  
LED BATTEN FITTINGS



**CAESAR LED Batten**  
1,200mm (4ft), Standard and Emergency

- LED replacement for 2 x 36W T8 fluorescent fittings
- 100 lumens per circuit watt
- 4,000K natural white light output
- 50,000 hour average rated LED life
- Suitable for PIR switching
- Suitable for back and side wiring
- Emergency version c/w test switch provides 3 hour emergency duration
- 10% lumen output in emergency mode

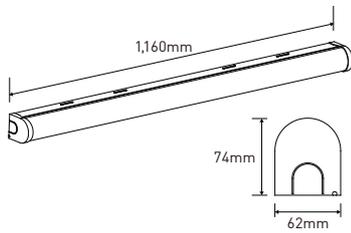

	LENGTH	WIDTH	HEIGHT
RCA484012-01	1,160mm	62mm	74mm
RCA484012E-01	1,160mm	62mm	74mm

Standard	<b>RCA484012-01</b>
Emergency	<b>RCA484012E-01</b>
<b>Comparable to:</b>	2 x 36W fluorescent
<b>Total Power (W):</b>	48
<b>Power Factor:</b>	0.9
<b>Total Light Output (lm):</b>	4,800
<b>Beam Angle (deg):</b>	120
<b>Lux at 1m (lux):</b>	1,000
<b>CCT (K):</b>	4,000
<b>CRI:</b>	80
<b>Efficacy (lm/cctW):</b>	100
<b>Lifetime (hrs):</b>	50,000
<b>Length (mm):</b>	1,160
<b>Width (mm):</b>	62
<b>Height (mm):</b>	74
<b>Weight (kg):</b>	2.10
<b>IP:</b>	20

