

Product Line : STANILITE

Product Group : EMERGENCY POWER PACK SERIES

Additional Description : T8 NEXUS EMERGENCY POWER PACKS



Image indicative only

| Catalogue # | Description | Battery Pack | Battery Description |
|-------------|----------------------------|--------------|---------------------|
| PPNXS18 | Nexus Inverter Pack 18W T8 | 03-01015P | 3C NiCad |
| PPNXS36 | Nexus Inverter Pack 36W T8 | 03-01001P | 4C NiCad |
| PPNXS58 | Nexus Inverter Pack 58W T8 | 03-01013P | 5C NiCad |

Note: All Emergency Power Packs include the Battery Pack.


Features :

- Available to run many lamp sizes in Non Maintained and Maintained mode of operation

Dimensions:

| Power Pack | Mounting Hole Centres |
|---------------------------------|-----------------------|
| 236mm (L) x 47mm (W) x 41mm (H) | 226mm |

Battery Packs:

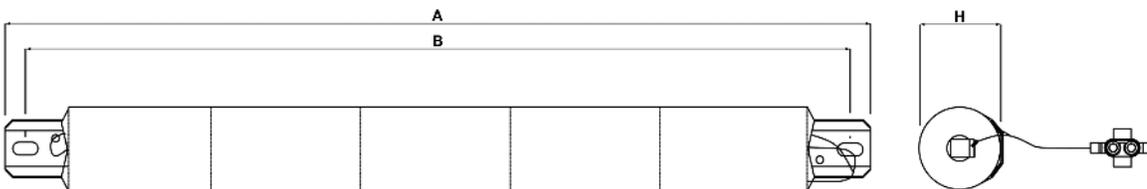

| Battery Pack | Length (A) | Mounting Hole Centres (B) | Height (H) |
|--------------|------------|---------------------------|------------|
| 03-01015P | 220mm | 204mm | 32mm |
| 03-01001P | 280mm | 264mm | 32mm |
| 03-01013P | 340mm | 324mm | 33mm |

Note: Lead length for all battery packs is 200mm

Construction :

| | |
|-------------|-------------------------|
| Body | White colour bond steel |
|-------------|-------------------------|