

Catalogue No: **KTA7-45H-45A**

MOTOR PROTECTION CIRCUIT BREAKER 32-45A

Motor Control and Drives > Motor Starting and Protection > Motor Protection Circuit Breakers > Sprecher + Schuh Motor Protection Circuit Breakers > KTA7 Motor Protection Circuit Breakers > KTA7-45H Motor Protection Circuit Breakers



Representative Photo Only
(actual product may vary based on configuration selections)

Motor Protection circuit breake 32...45 Amp


- Trip position: separate handle position indicates a trip has occurred, for easy identification
- Short circuit trip indication: identifies a short circuit trip, enabling operators to identify a fault quickly, reducing downtime
- Front mount auxiliary contacts require no additional panel space

SPECIFICATIONS

Component Type	Motor Control and Drives	Motor Protection Circuit Breaker
Approx. kW (AC 3, 400/415 V AC)	18.5...22 kW	
Ie, rated operational current, nom	45 A	
Ir, Thermal Trip Current, Min	32 A	
Ir, Thermal Trip Current, Max	45 A	
Im, Magnetic Trip Current	585 A	
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 400V AC	65 kA	
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 415V AC	65 kA	
Ics, Rated Service Short-Circuit Breaking Capacity, 400V AC	50 kA	
Ics, Rated Service Short-Circuit Breaking Capacity, 415V AC	50 kA	
IP Rating	IP20	

REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

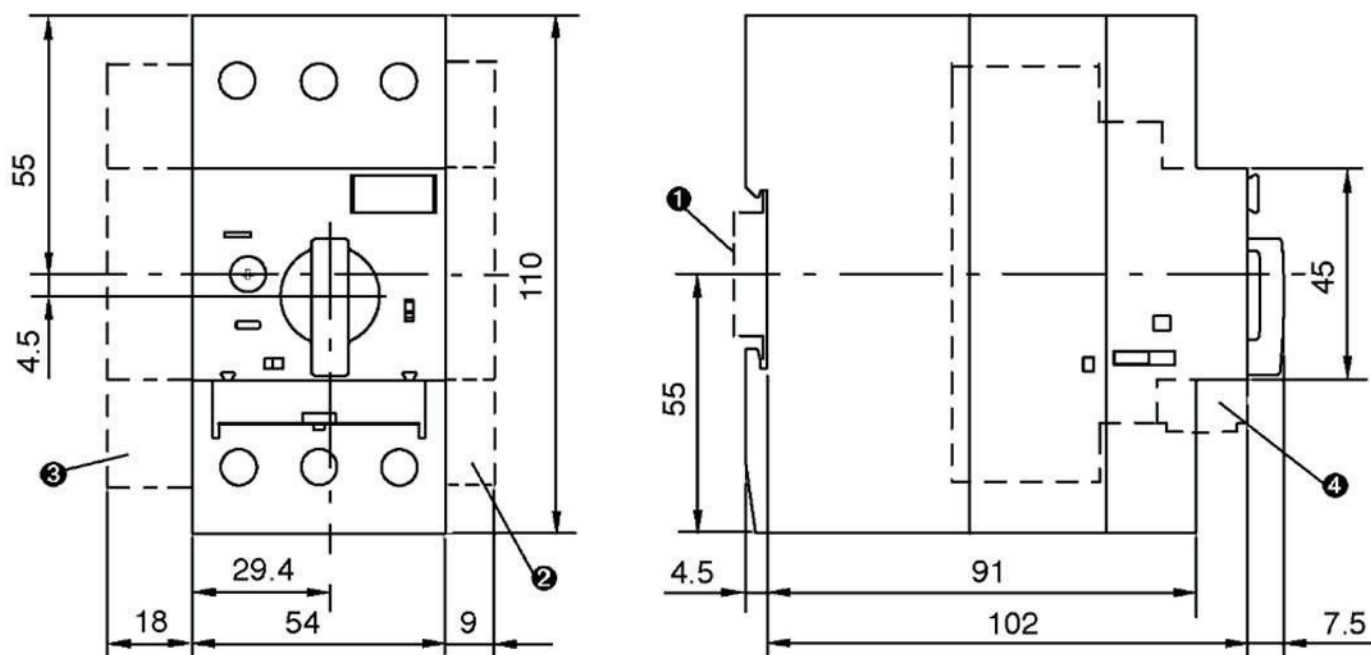

Dimension Diagram