


EV-UMBRA-PRO-DIFF-1200-S

Professional Diffused Batten, DALI Tuneable White (DT8-Tc)

FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 10 year Product design life at 40 degrees and 24 hours use.
- Microwave sensor suitable for DALI-2 (IEC 62386-303) allows unlimited control on DALI-2 compliant control systems.
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Corridor mode function in standalone operation
- Corridor mode support in standalone mode to intelligently save power by turning off when there is no occupancy.
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.

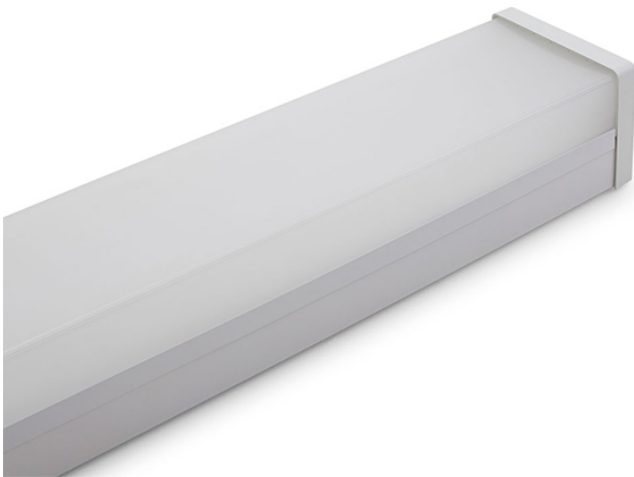

ORDERING INFORMATION	
Order code	12239
Description	UMBRA PRO 1200mm Diffused LED batten with sensor
Driver Type	DALI DT8 Dimmable
DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.	
Item Code	EV-UMBRA-PRO-DIFF-1200-S

MECHANICAL	
Body Material	Powder Coated Steel
Diffuser Material	PMMA
Fitting Colour	White
Installation Type	Surface mount
IP Rating	IP20



ELECTRICAL

Electrical Rating	Class I
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	33 W
Power Factor	0.95
Standby Power	0.3 W

Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.

Switch Type	Inbuilt Mains Rated DALI Switch
-------------	---------------------------------

A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).

Working Temp Range	0 to 40 °C
--------------------	------------

LAMP

Macadam Steps (SDCM)	3-step MacAdam Ellipse
CCT Configuration	TUNEABLE WHITE
Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.	
CRI	>84
Lamp/LED Current	850 mA
Lamp/LED voltage	36 V

LED LIFETIME

LED Lifetime	>120000 hrs	
This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.		
Ambient Temp (°C)	25 °C	40 °C
L90B10	43000 hrs	43000 hrs
L80B10	90000 hrs	90000 hrs
L70B10	>120000 hrs	>120000 hrs
L70B50	>120000 hrs	>120000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 70% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime,

the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

TM-21 Test Hours	20000 hrs
------------------	-----------

COLOUR TEMPERATURE

CCT	3000 to 6500
CCT Colour	Tunable White
System Lumens	>4400 lm

All photometric data has a tolerance of $\pm 10\%$.

DRIVER

Dimmable	Yes
Driver Included	Yes
Integrated Driver	No
Driver Type	DALI DT8 Dimmable

DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.

Power Monitoring	DALI Device type 51 power monitoring
------------------	--------------------------------------

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

Wiring Type	Re-wireable terminal block (6 pin)
-------------	------------------------------------

SENSOR (S SUFFIX)

Adjustable Detection Area / Sensitivity	Yes
Adjustable Hold Time	Yes
Adjustable Standby Level	Yes
Adjustable Standby Period	Yes
Corridor Function	Yes
Dawn Reset	No
Detection Range	10 m
Dusk Mode	No
Lux Adjustment	No
Manual Override	Yes
Sensor Communication	DALI 2

Inbuilt DALI-2 Sensor for use with DALI-2 Compliant control systems. Some features and functions are only available for use with DALI-2 Application controllers which support the features. This product also supports a standalone mode for limited use without a DALI-2 application controller.



Sensor Type	Microwave
Switched Output	No
Time Delay	Via DALI

COMPLIANCE

Product Design Life	10 years
---------------------	----------

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Standards	AS/NZS 60598.1 AS/NZS 60598.2.1 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15 AS/NZS 4268 IEC 62386-102 IEC 62386-103
-----------	---

WARRANTY

Commercial Use Warranty	2 Onsite, 3 RTB (Total 5 Years)
-------------------------	---------------------------------

This product is covered with our extended commercial use warranty, which covers the product for up to 5-years. The first 2-years of the warranty is provided onsite within our terms and conditions and the remaining 3-year period is covered by a return to base warranty.

Warranty Operating Hours	30000 hrs
--------------------------	-----------


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

DIMENSIONS

Product Height	93 mm
Product Length	1230 mm
Product Width	130 mm


LINE DRAWINGS

EV/UMBRA/PRO/DIFF

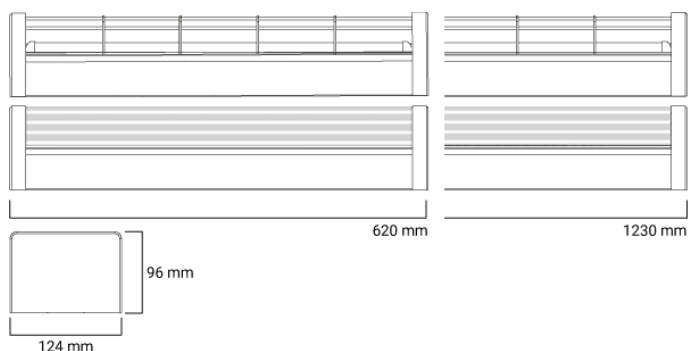


PHOTOMETRICS


EV/UMBRA/PRO/DIFF/1200/3000K

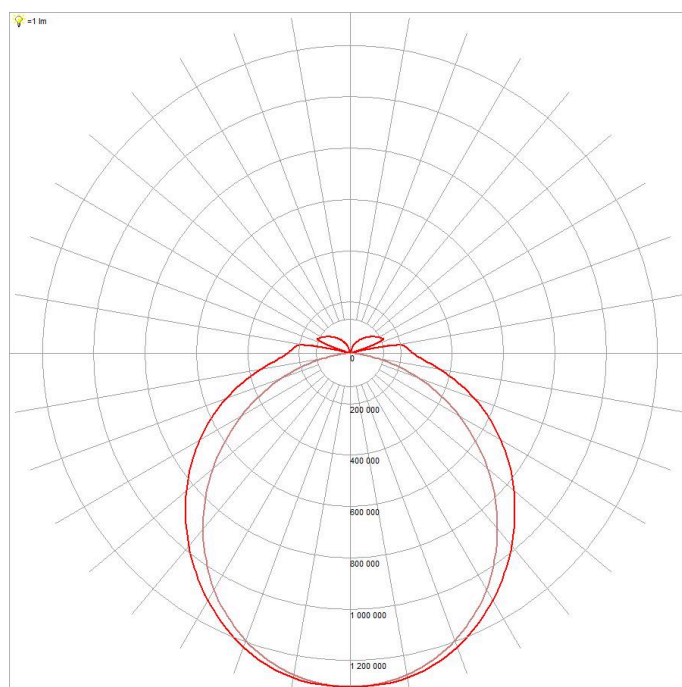

EV/UMBRA/PRO/DIFF/1200/5000K

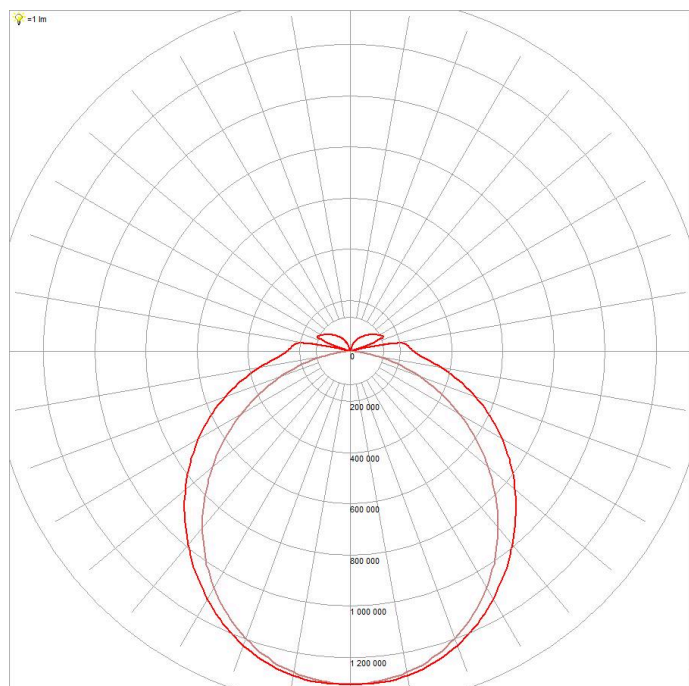

EV/UMBRA/PRO/DIFF/1200/6500K

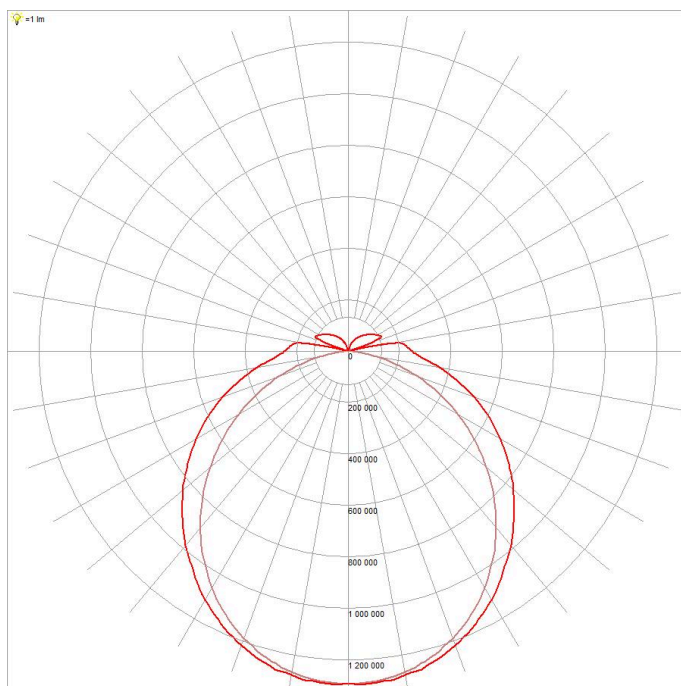

EV/UMBRA/PRO/DIFF/1200/4000K

