


Garland's Pro Series range is the experts' choice for high quality cables.

Figure 8 Cable


Part No: TCW24BKWHPE

Description	Stranded 19AWG (24/0.2mm) PACW, Figure 8 construction, PE Insulation.
Applicable Standards	AS/CA S-008
Suitable Applications	For the wiring of electronic and allied equipment, extension speakers, security system etc.

Cable Construction Drawing

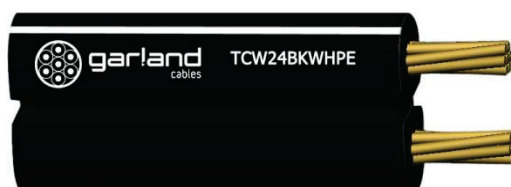

Cable Construction Relative Parts

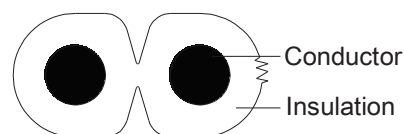

Cable Description

Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	19	24/0.2	0.75	1.13	PACW
Insulation	Cores : 2 Material : PE Colour : Black/White Stripe (Signal Black RAL 9004) Nominal Thickness (mm) : 0.75 Nominal OD (mm) : 2.7 x 5.4				

Electrical Properties

Voltage Rating	ELV
Max. Conductor DC Resistance @ 20°C	27.5Ω/km
Min. Insulation Resistance @ 20°C	50MΩ.km

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland



Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Voltage Test: Conductor to core

1.5 kV ac/1min

Mechanical Properties

Operating Temperature Range -25 to 70°C

Max. Recommended Pulling Tension 105N

Min. Bend Radius (install) 27mm

Approximate Mass 2.18kg/100m

Sheath Printing V97215  GARLAND FIGURE 8 TCW24PE - 2 X 24/0.2

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
500m	Wooden Reel	W26 x H21.8cm	1R	

Document Change Record	Issue	Date	Prepared by	Approved By
	01	05-12-2012	LLS	Pent
Change History	Issue	Change		

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

