



**FEATURES**

High speed and compact at only 102mm deep. Designed for confined spaces. Operates automatically using infrared sensor. Auto-resetting thermostat, owner adjustable air speed and air temperature, on/off heating options. Dryer automatically shuts off after time-out when user removes hands from sensor zone.

**INSTALLATION OPTIONS**

Electrical connection by cord & plug (as supplied). Can be direct wired by an electrician.


**SPECIFICATION**

- Electrical Supply: AC, 220–240V 50/60Hz, 1000 Watt, 4.2A
- Motor: 0.67HP Brush Type, Dual Ball Bearings 500 Watt
- RPM: 16,000 - 29,000 (adjustable)
- Element: 325-500 Watt (adjustable)
- Air Velocity: 42 – 60 CFM
- Noise Level: 68.9 – 74.3 dB (A)
- Weight: 3.8kg, Shipping 4.2kg
- Drying Time: Less than 15 seconds
- Certificate of Suitability No: SAA131995
- Electrical Safety Requirements: AS/NZS 60335.2.23:2004
- Protection Category: IPX3

**FINISH**

Satin Stainless Steel, 18 gauge.


**RECOMMENDED INSTALLATION HEIGHT**


Men's washroom	1270mm
Women's washroom	1194mm
Children's washroom ages 4-7	889mm
Children's washroom ages 8-10	991mm
Children's washroom ages 11-13	1092mm
Children's washroom ages 14-16	1194mm
Accessible Compliant washroom	1016mm 

**WARRANTY**

5 years.

**Turbo-Slim Satin Stainless Steel** shall be Model No. 10-0199-2-93 as manufactured by ASI JD MacDonald.

 All ASI JD MacDonald disabled compliant products, when installed, must be in accordance with AS1428 to ensure the specified product is complying with all washroom specification requirements.

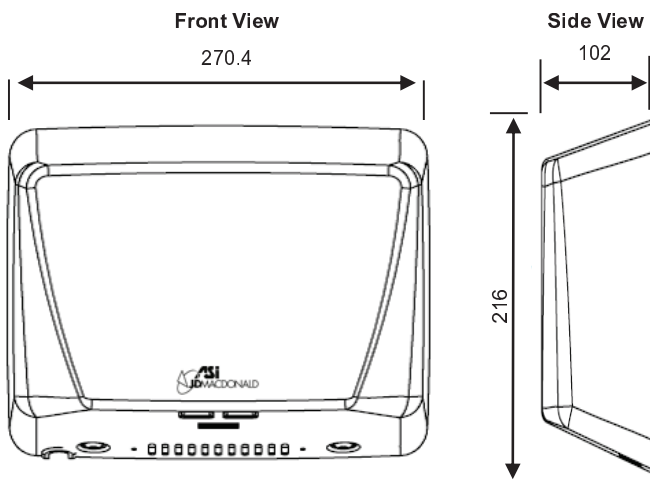

ASI JD MacDonald reserves the right to, and does from time to time, make changes and improvements in design and dimensions. The photographs and line drawings of the products in this flyer are representational only. All dimensions are in millimetres.