


LED LINKABLE BATTEN RANGE

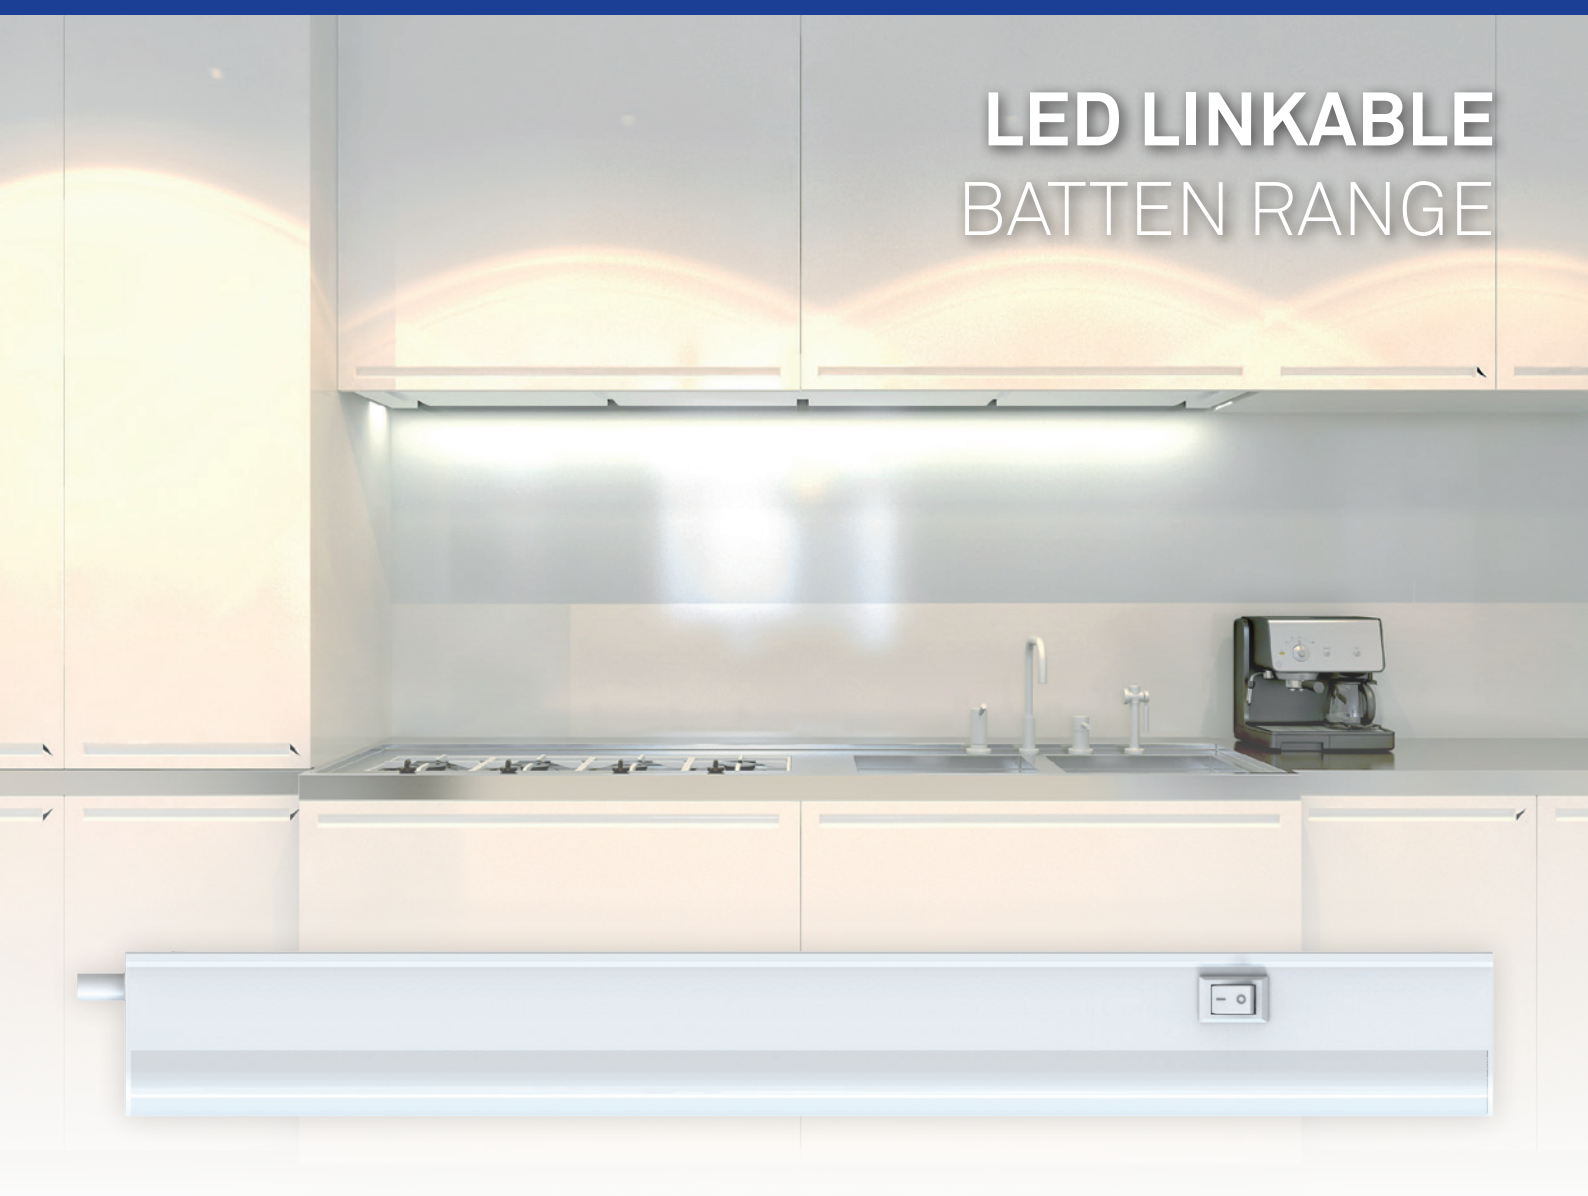

PIERLITE MINILUX LINKABLE LED BATTEN

Introducing new versatile Minilux Linkable LED Batten which can be linked with further battens to suit individual needs. Ideal lighting solution for pelmets, kitchens, cabinets and under bench space.

PIERLITE MINILUX LINKABLE LED BATTEN

PIERLITE Minilux LED Batten is the ideal linkable batten for clean even light distribution. This modular linkable style fuses form with function. Available in 4 sizes, 2 colour temperatures and various wattage options.

FEATURES


- 1 piece polycarbonate opal diffuser and housing
- Available in 8 versions: 4 different sizes and 2 colour temperatures within each size
- Built in driver
- Complete with 1.2m flex & plug and connecting cables
- Complete with mounting accessories for quick & easy installation
- Average rated design life 25,000hrs*
- Non Dimmable

BENEFITS

- Ideal for task & accent lighting uses, under cabinets & bench tops and over work spaces
- Complete with connecting cables, mounting bracket & screws for easy installation
- Unobtrusive slimline design

SPECIFICATIONS

- Voltage: 240V
- Wattage: 4.8W/9.3W/13.5W/18.5W
- Colour Temperature: 3000K and 4000K
- Size options: 300/600/900/1200mm length
- Ambient Temperature: Ta25
- Colour Rendering Index: CRI>80
- Ingress Protection: IP20 for indoor use
- Not suitable for dimming

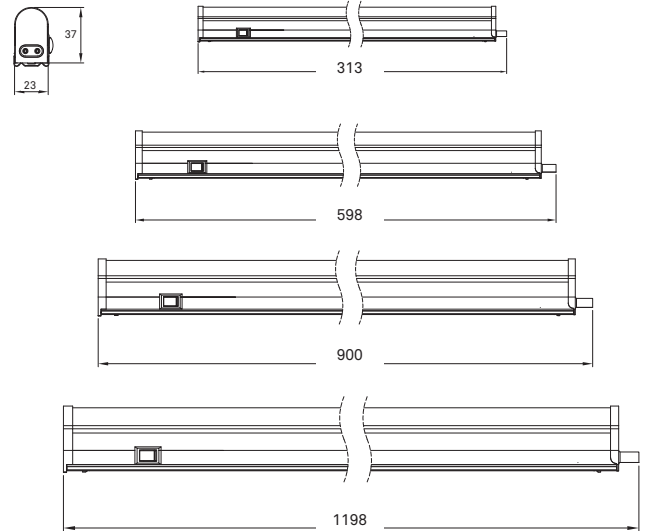

Model Number	Max Connectable Quantity
Minilux3/3K, Minilux3/4K	30pcs
Minilux6/3K, Minilux6/4K	15pcs
Minilux9/3K, Minilux9/4K	12pcs
Minilux12/3K, Minilux12/4K	8pcs

APPLICATIONS

Residential kitchen, cabinets, hotels or retail applications

PRODUCT CODE	DESCRIPTION	WATTAGE	LUMEN	COLOUR TEMP	DIMENSION (MM)	MASS (KG)
Minilux3/3K	Minilux LED Linkable 300mm	4.8W	420lm	3000K	L:312.5 x W:22.4 x H:37.1mm	0.08
Minilux3/4K	Minilux LED Linkable 300mm	4.8W	450lm	4000K	L:312.5 x W:22.4 x H:37.1mm	0.08
Minilux6/3K	Minilux LED Linkable 600mm	9.3W	850lm	3000K	L:597.5 x W:22.4 x H:37.1mm	0.122
Minilux6/4K	Minilux LED Linkable 600mm	9.3W	900lm	4000K	L:597.5 x W:22.4 x H:37.1mm	0.122
Minilux9/3K	Minilux LED Linkable 900mm	13.5W	1250lm	3000K	L:900.5 x W:22.4 x H:37.1mm	0.171
Minilux9/4K	Minilux LED Linkable 900mm	13.5W	1350lm	4000K	L:900.5 x W:22.4 x H:37.1mm	0.171
Minilux12/3K	Minilux LED Linkable 1200mm	18.5W	1750lm	3000K	L:1197.5 x W:22.4 x H:37.1mm	0.221
Minilux12/4K	Minilux LED Linkable 1200mm	18.5W	1850lm	4000K	L:1197.5 x W:22.4 x H:37.1mm	0.221



*Rated average design life is based on application of PIERLITE's product operating and maintenance guidelines; see www.gerardlighting.com.au. Actual product life may vary dependent upon frequency of maintenance and product application.